
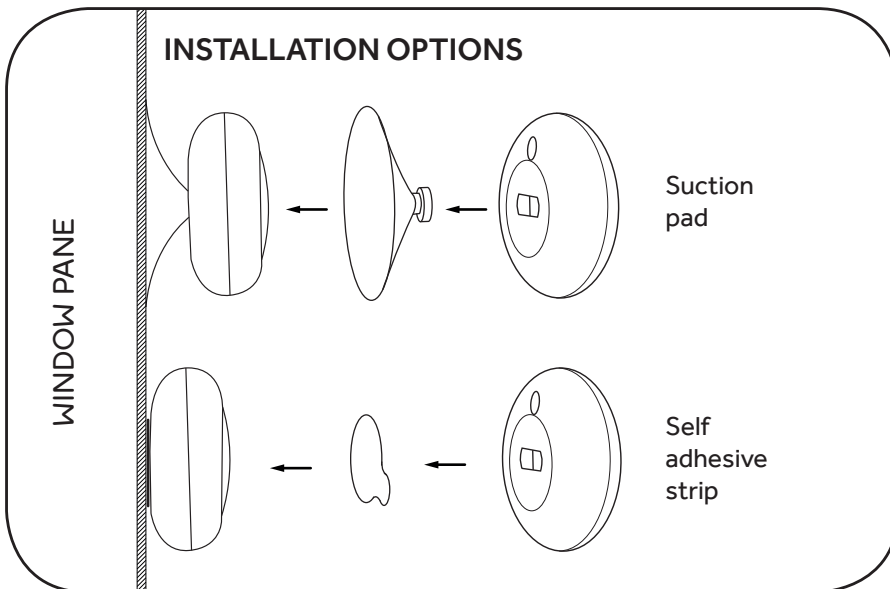


SUN SENSOR 191727


V1

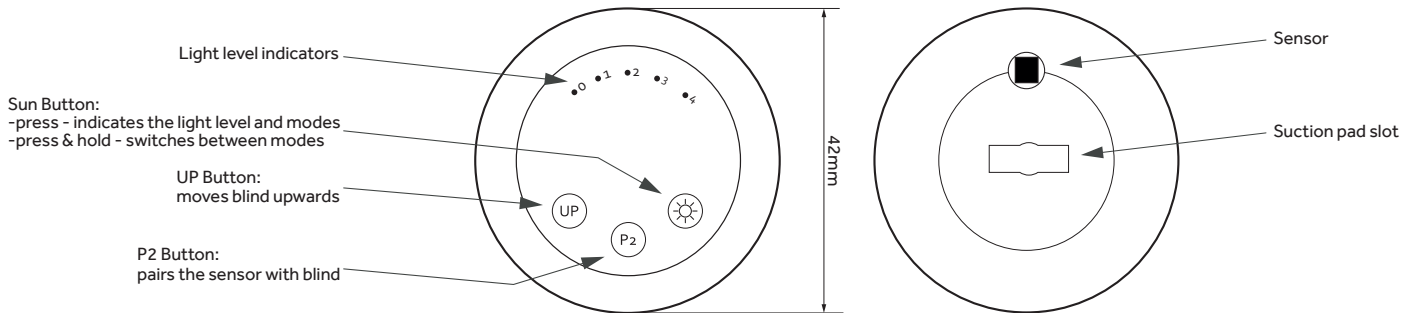


TECHNICAL SPECIFICATIONS

- Input voltage: 3V
- Transmitting frequency: 433.925MHz
- Transmitting power: 10 milliwatt
- Light intensity range: 15 ~ 75kilolux
- Operating temperature: -20c - 60c

PAIRING SENSOR WITH A SINGLE BLIND

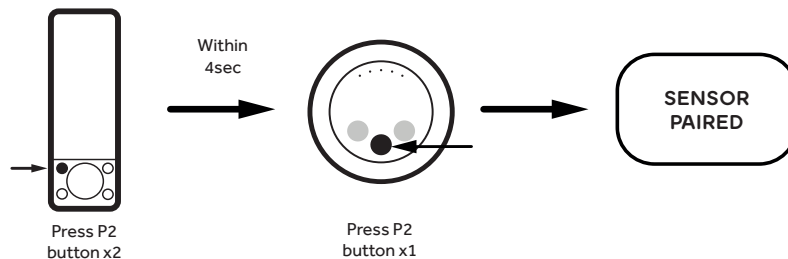

PAIRING SENSOR WITH MULTIPLE BLINDS BLIND

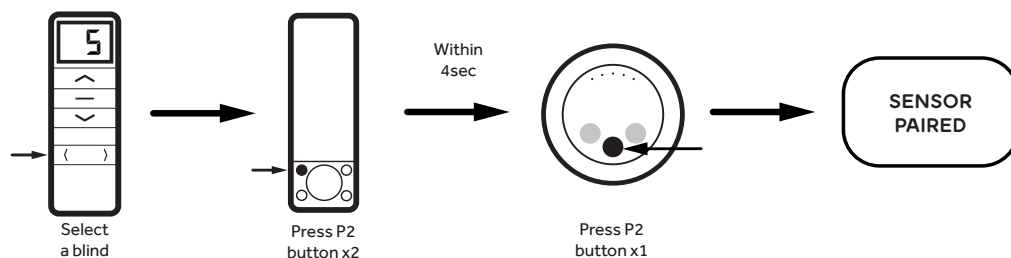


LIGHT LEVELS




For UK use, we recommend **LIGHT LEVEL 1** as a default setting.

- Light Level 0 0 - 15 kilolux
- Light Level 1 15 - 30 kilolux
- Light Level 2 30 - 45 kilolux
- Light Level 3 45 - 60 kilolux
- Light Level 4 60 + kilolux



SWITCHING LIGHT LEVELS

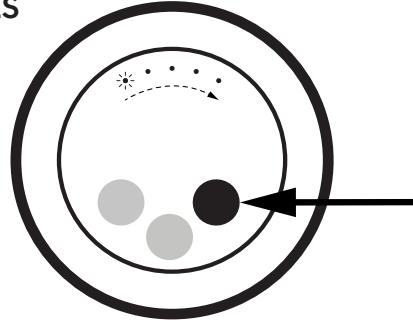

Press the sun button in quick succession to cycle between **LIGHT LEVELS**

SENSOR MODES

MODE 1

When the sun is out continuously for 2mins, the sensor will command the blind to close. You will have to use a remote controller to open the blind again. After opening the blind the process of closing will repeat as normal.

MODE 2

When the sun is out continuously for 2mins, the sensor will command the blind to close. When the light level falls below the threshold of 15 kilolux (Light Level 1) for continuous 15mins, the sensor will command the blind to open. Even a short burst of light over the 15kilolux after the blind being shut will reset the timer on the sensor.


MODE 3

When the sun is out continuously for 2mins, the sensor will command the blind to close. When the light level falls below the threshold of 15kilolux (Light Level 1) within 15mins sensor will open the blind insantiously. If the light level falls below the treshold after 15mins, sensor will comand to open the blind after 15mins.

MODES INDICATOR


Amount of flashes indicating the mode:

- ☀️ ☀️ - Mode 1
- ☀️ ☀️ ☀️ - Mode 2
- ☀️ ☀️ ☀️ ☀️ - Mode 3



Press the sun button x1, sensor indicates light level and mode by flashing an indicator light

SWITCHING MODES




Press and hold the sun button for 5sec to cycle between **MODES**



Indicator flashes x5

MODE CHANGED

LOW BATTERY ALERT



When the battery level is low the indicator light will flash x10 every 2mins.



Damaged/unused electrical products and batteries are not be disposed with regular household waste. Dispose of this device in compliance with your authorities waste regulations. Alternatively, return your motors to Decorquip Ltd.



Decorquip Ltd

Rhymney House, Unit 8, Bedwas House Industrial Estate, Bedwas, Caerphilly, CF83 8DW. T: 029 2088 0811