



CAPITAL

Collection



Ormond

Robust light-filtering FR fabric with antimicrobial coating

3100mm

Ormond

Robust light-filtering FR fabric with antimicrobial coating

Thanks to an *antimicrobial* finish that is resistant to bacteria and withstands aggressive cleaning methods, Ormond is perfectly suited to hospitals and other care environments.

With fire retardant properties and a width of over three metres, Ormond is an easy choice for those who value practicality and functionality.



Certified fire retardancy



Light-filtering fabric for more control than sheers




Antimicrobial coating, and resistant to intensive cleaning

Ormond	
Product	Roller
Composition	100% PES
Roller - roll width	3100mm
Roller - roll length	ca. 42m
Weight	290g/m ²
Thickness	0.42mm
FR Classifications	BS 5867-2, TYPE B DIN 4102, CLASS B1 NFPA 701
Colour Fastness (ISO 105 - B02)	Grade 5
Cleaning	Damp cloth
Recommended cut method	Cold Cut, Ultrasonic
Oeko-Tex Standard 100	Yes
Suitable for moist conditions	Yes

Technical Specifications										
Colour	Thermal						Visual			
	Ts %	RS %	As %	GTOT INT GLAZING C		GTOT INT GLAZING D		Tv %	Rv %	Av %
				GTOT	CLASS	GTOT	CLASS			
White	12	79	9	0.31	2	0.24	2	10	88	2
Cream	11	73	16	0.33	2	0.24	2	9	82	9
Clay	7	64	29	0.36	1	0.25	2	4	70	26
Mist	3	52	45	0.4	1	0.26	2	2	57	41
Stone	1	35	64	0.45	1	0.28	2	1	40	59

Ts = Solar Transmittance	Rs = Solar Reflectance	As = Solar Absorbance	Tv = Visual Transmittance	Rv = Visual Reflectance	Av = Visual Absorbance
Gtot = Total solar energy reflectance		Glazing C = Double glazing as described in EN 14501:2021		Glazing D = Solar control glazing as described in EN 14501:2021	

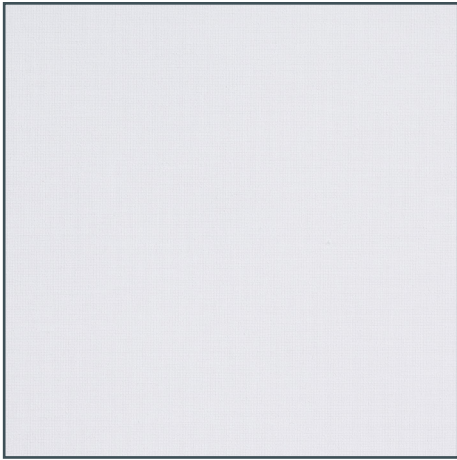


White

3100mm




Cream

3100mm

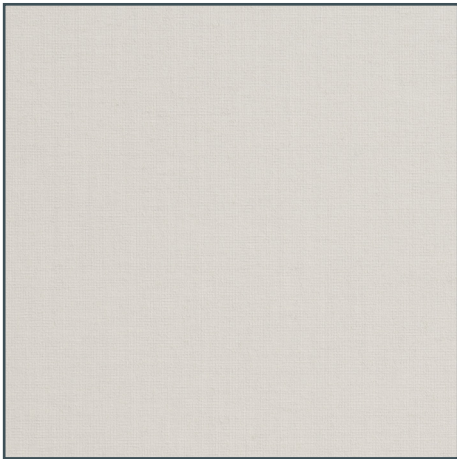


Clay

3100mm

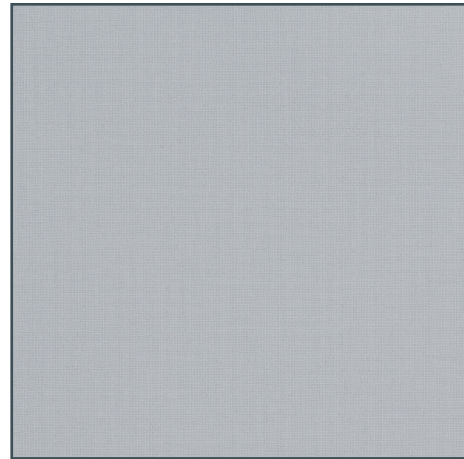

Mist

3100mm

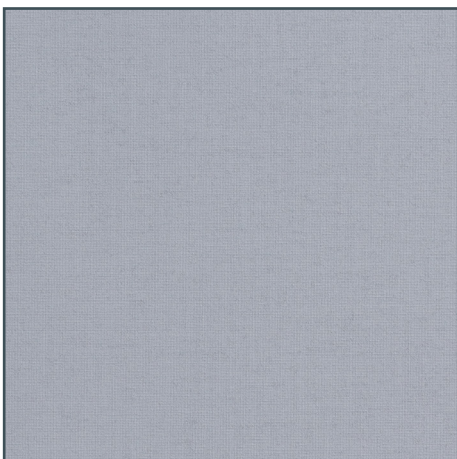

Stone

3100mm