

ACT60 Curtain Track

Fitting, operation and maintenance instructions


Warning! The operating instructions must be read before operating the blind.

Fitting Instructions for ACT60 Corded and Uncorded Curtain Tracks | Top-fix Installation

This procedure can be completed by non-professionals.


Step 1 - Position the brackets

Ensure that each supplied bracket is positioned at least 50 mm from each end of the track, with any remaining brackets spaced no more than 500 mm apart. Check that all brackets are aligned evenly before securing them in place.

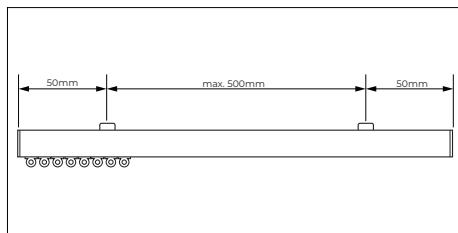


Step 2 - Mark, drill, and secure the brackets

If necessary, mark the screw positions by pencil through the bracket slots. Drill and plug the holes as required, then fix the brackets securely using appropriate fixings. (Please note that screws and fixings are not supplied).



Step 3 - Install the track


Once the brackets are securely fixed, remove the track from its packaging and carefully clip it into the brackets, and close the bracket lever to lock the track, ensuring that it is firmly secured in place.

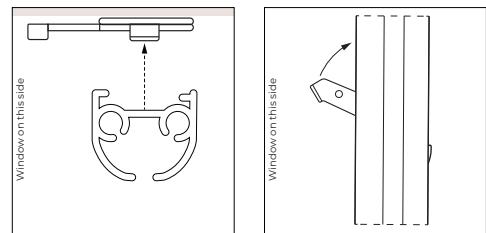

Fitting Instructions for ACT60 Corded and Uncorded Curtain Tracks Face-fix Installation with L Bracket


Step 1 - Bracket assembly

Attach the Ceiling Swivel Bracket to the L Bracket and secure it in place using the supplied screw.




Step 2 - Bracket positioning

Ensure that each bracket is positioned at least 50 mm from each end of the track, with any remaining brackets spaced no more than 500 mm apart. Check that all brackets are aligned evenly before securing them in place.

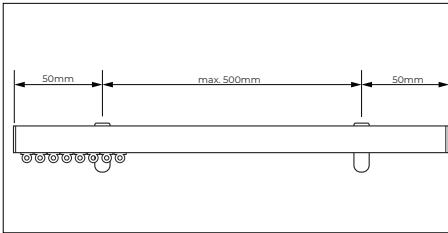

Step 3 - Mark, drill, and secure the brackets

If necessary, mark the screw positions by pencil through the bracket slots. Drill and plug the holes as required, then fix the brackets securely using appropriate fixings. (Please note that screws and fixings are not supplied).



Step 4 - Install the track



Once the brackets are securely fixed, remove the track from its packaging and carefully clip it into the brackets, ensuring that it is firmly secured in place. Refer to Step 3 for single track installation.

Note: When using the L Bracket, all ACT systems can be adapted for double-track installations. For installation instructions, please scan the QR code.



Joined tracks

If your track is longer than 5 metres, it will be supplied in two sections along with a Track Connector. To join sections, slide the provided Track Connector on top the first section of the track, then insert the second section into the connector. Push both sections together until they are fully aligned and securely joined. Once assembled, proceed to Step 3.

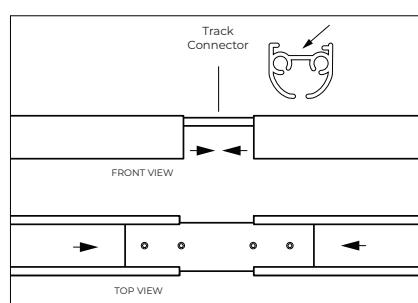


ACT60 Corded Track | Fitting the safety device: 'P' Clip 400990

This procedure can be completed by non-professionals.


Step 1 - Attach the 'P' Clip to the Chain

Once the blind is securely fitted, attach the cord to the 'P' Clip.

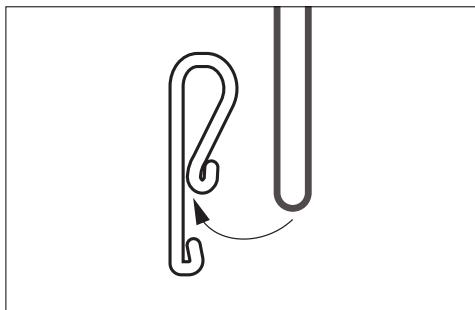


Step 2 - Mark fixing points

Pull the cord taut with the device, placing it as far from the truck as possible. This keeps the chain tight, preventing slack and enhancing child safety. Once positioned, mark through the screw holes to indicate where the device will be fixed.

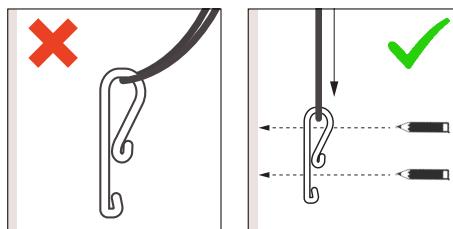


Step 3 - Secure the Device

Move the device to one side and, using the marks made in Step 2, drill and plug the holes. Then reposition the device and fix it into place, ensuring it is securely mounted.

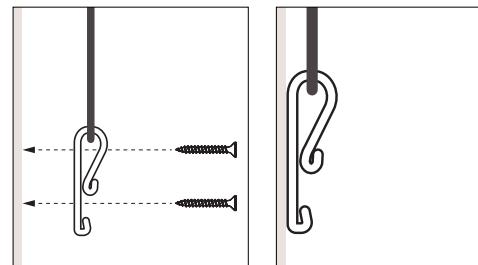

Note: If your blind has been supplied with a different safety device, please refer to the specific installation instructions available on our website for that device - www.decorquip.com

⚠️ WARNING ⚠️



Young children can be strangled by loops in pull cords, chains, tapes and inner cords that operate the product.

To avoid strangulation and entanglement, keep cords out of the reach of young children. Cords may become wrapped around a child's neck.

Move beds, cots and furniture away from window covering cords.

Do not tie cords together. Make sure cords do not twist and create a loop.

Always fit the chain and rear cord safety devices.

Operation & Maintenance

Warning! The operating instructions must be read before operating the blind.

Operating instructions for hand-drawn ACT60 Track

1. Ensure the track and curtain fabric is free of obstructions and that gliders move smoothly.
2. Gently pull the curtains along the track to open or close. Avoid forcing them to prevent damage.

Operating instructions for corded ACT60 Track

1. Ensure the track and curtain fabric is free of obstructions and that gliders move smoothly.
2. Gently pull the operating cord to close or open the curtain

Maintenance Instructions

This product is designed to be maintenance-free; however, we recommend carrying out regular visual inspections to ensure that no components are damaged, as this could lead to operating difficulties or pose a safety risk. If any maintenance is required, it should be completed promptly by a reputable blind company.

For smooth glider movement, a small amount of silicone-based lubricant may be applied.

Do not hang heavy items on the curtain track or pull forcefully. For safety and performance, do not make alterations to the track.