

# Capital Fascia

## Fitting and maintenance instructions


### Fitting Instructions for Straight and Joined Capital Fascia | Top-fix installation

#### Top Fix Bracket + Adjustment Bracket

This procedure can be completed by non-professionals.


#### Step 1 - Position the brackets

Ensure that each supplied bracket is positioned at least 50 mm from each end of the fascia, with any remaining brackets spaced no more than 500 mm apart. Check that all brackets are aligned evenly before securing them in place.

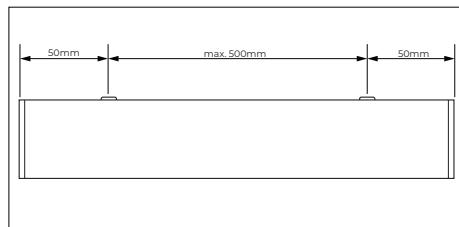



#### Step 2 - Mark, drill, and secure the brackets

If necessary, mark the screw positions by pencil through the bracket slots. Drill and plug the holes as required, then fix the brackets securely using appropriate fixings. (Please note that screws and fixings are not supplied).




#### Step 3 - Install the fascia

Once the brackets are securely fixed, remove the fascia from its packaging and carefully clip it into the brackets, ensuring that it is firmly secured in place.





#### Step 4 - Bracket Adjustment (optional)

Once the fascia has been fitted, insert the Adjustment Bracket into the grooves located at the back of the fascia. Using a screwdriver, adjust the fascia angle by tightening or loosening the grab screw until the desired position is achieved.

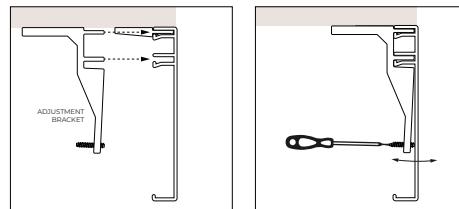

#### Joined fascia assembly

If your fascia is supplied in two sections, a joiner will be pre-attached to one section. Align the second fascia section with the joiner and carefully push it into place until both sections are perfectly aligned. Secure the connection using the provided screws to ensure a stable and seamless finish. Once assembled, proceed with the fitting process starting from **Step 1**.

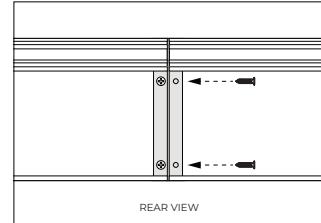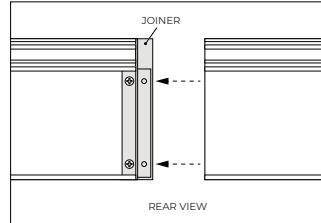



### Fitting Instructions for Capital Fascia with returns | Face-fix installation

#### Top Fix Bracket + L Bracket

This procedure can be completed by non-professionals.


#### Step 1 - Install the returns

The fascia and returns are supplied separately, with **90° Corners** pre-attached to both ends of the front fascia panel. Align each return with the corresponding corner and carefully push it into place until both components are perfectly aligned. Secure the connection using the provided screws to ensure a stable and seamless finish.

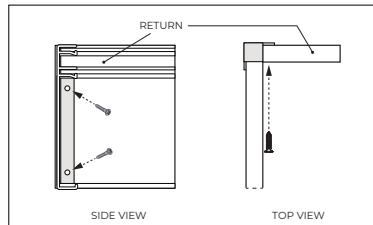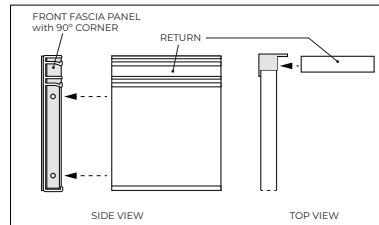


#### Step 2 - Bracket assembly

Attach the Top Fix Bracket to the L Bracket and secure it in place using the supplied screw.




#### Step 3 - Position the brackets

Ensure that each assembled bracket is positioned at least 50 mm from each end of the fascia, with any remaining brackets spaced no more than 500 mm apart. Check that all brackets are aligned evenly before securing them in place.

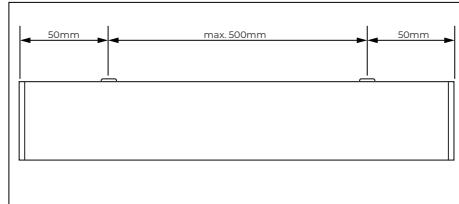



#### Step 4 - Mark, drill, and secure the brackets

If necessary, mark the screw positions by pencil through the bracket slots. Drill and plug the holes as required, then fix the brackets securely using appropriate fixings. (Please note that screws and fixings are not supplied).



#### Step 5 - Install the fascia

Once the brackets are securely fixed, remove the fascia from its packaging and carefully clip it into the brackets, ensuring that it is firmly secured in place.



## Maintenance

### Maintenance Instructions

This product is designed to be maintenance-free; however, we recommend carrying out regular visual inspections to ensure that no components are damaged, as this could lead to operating difficulties or pose a safety risk. If any maintenance is required, it should be completed promptly by a reputable blind company.

For light cleaning, gently wipe or dust the fascia with a soft brush or duster.