

Free-hanging Pleated Blind

Fitting, operation and maintenance instructions


Warning! The operating instructions must be read before operating the blind.

Fitting Instructions for Free-hanging Pleated Blinds | Top-fix Installation

This procedure can be completed by non-professionals. Headrails shall not be installed less than 1.5m from the floor.


Step 1 - Identify and position the brackets

Ensure that each supplied bracket is positioned at least 50 mm from each end of the blind, with any remaining brackets spaced no more than 500 mm apart.

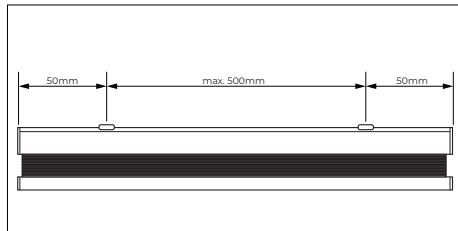


Step 2 - Mark, drill, and secure the brackets

If necessary, mark the screw positions by pencil through the bracket slots. Drill and plug the holes as required, then fix the brackets securely using appropriate fittings. (Please note that screws and fixings are not supplied).



Step 3 - Install the blind

Once the brackets are securely fixed, remove the blind from its packaging and carefully clip it into the brackets, ensuring that it is firmly secured in place.




Fitting Instructions for Free-hanging Pleated Blinds | Face-fix Installation

This procedure can be completed by non-professionals. Headrails shall not be installed less than 1.5m from the floor.


Step 1 - Identify and position the brackets

Ensure that each supplied bracket is positioned at least 50 mm from each end of the blind, with any remaining brackets spaced no more than 500 mm apart.

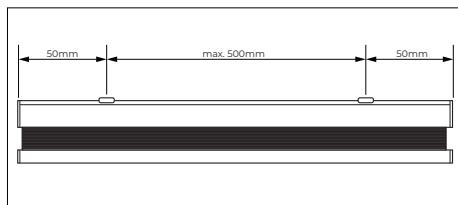


Step 2 - Mark, drill, and secure the brackets

If necessary, mark the screw positions by pencil through the bracket slots. Drill and plug the holes as required, then fix the brackets securely using appropriate fittings. (Please note that screws and fixings are not supplied).



Step 3 - Install the blind

Once the brackets are securely fixed, remove the blind from its packaging and carefully clip it into the brackets, ensuring that it is firmly secured in place.



Fitting the safety device: Cleat Hook


Not applicable for motorised pleated blinds. This procedure can be completed by non-professionals. There are different types of cleat hooks available; however, the fitting principle is the same.

Step 1 - Positioning the cleat hooks

Both cleat hooks supplied must be installed on the control cords side of the blind. They should be fitted one above the other, as close to the headrail as possible, and at a height of not less than 1.5 metres from the floor.

Step 2 - Mark, drill, and secure the brackets

If necessary, mark the screw positions by pencil through the cleat hooks. Drill and plug the holes as required, then fix the hooks securely using appropriate fittings. (Please note that screws and fixings are not supplied).

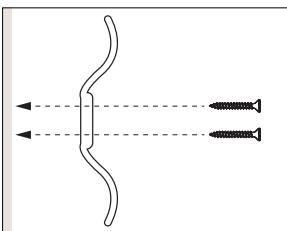


Step 3 - Secure the Device

Move the device to one side and, using the marks made in Step 2, drill and plug the holes. Then reposition the device and fix it into place, ensuring it is securely mounted.

When operating the blind, raise or lower it to the desired position and then wind the control cord fully around both cleats in a figure-of-eight motion. Make sure there are no loose loops or hanging cords once the blind is positioned.

⚠️ WARNING ⚠️



Young children can be strangled by loops in pull cords, chains, tapes and inner cords that operate the product.

To avoid strangulation and entanglement, keep cords out of the reach of young children. Cords may become wrapped around a child's neck.

Move beds, cots and furniture away from window covering cords.

Do not tie cords together. Make sure cords do not twist and create a loop.

Always fit the chain and rear cord safety devices.

Operation & Maintenance

Warning! The operating instructions must be read before operating the blind.

Operating instructions for cord-operated Free-hanging Pleated Blinds

1. Pull the cords downwards to open the blind. When the cord is released, the blind will stay in the desired position.
2. To close the blind, pull the cords to the middle of the blind and guide it into the cord lock. The blind will close. To stop the blind at any position, bring the cords back into the vertical position. The blind should lock.
3. When not in use, the operating cords must be fully wound round the cleat hooks.

Operating instructions for motorised Free-hanging Pleated Blinds

Use the supplied control device to operate the blind electronically. For detailed information on operating modes, please refer to the Motorisation Instructions supplied with this blind before use.

Maintenance Instructions

This product is designed to be maintenance-free; however, we recommend carrying out regular visual inspections to ensure that no components are damaged, as this could lead to operating difficulties or pose a safety risk. If any maintenance is required, it should be completed promptly by a reputable blind company.