

# Sloping Vertical Blind

## Fitting, operation and maintenance instructions

**Warning!** The operating instructions must be read before operating the blind.


### Fitting Instructions for Sloping Vertical Blinds | Top-fix installation

#### Top Clip Bracket

This procedure can be completed by non-professionals.


#### Step 1 - Position the brackets

Ensure that each supplied bracket is positioned at least 50 mm from each end of the headrail, with any remaining brackets spaced no more than 500 mm apart. Check that all brackets are aligned evenly before securing them in place.

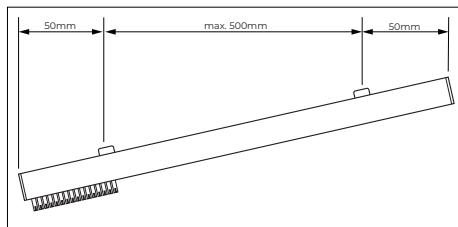


#### Step 2 - Mark, drill, and secure the brackets

If necessary, mark the screw positions by pencil through the bracket slots. Drill and plug the holes as required, then fix the brackets securely using appropriate fittings. (Please note that screws and fixings are not supplied).



#### Step 3 - Install the brackets

Once the brackets are securely fixed, remove the headrail from its packaging and carefully clip it into the brackets, ensuring that it is firmly secured in place.




### Fitting Instructions for Sloping Vertical Blinds | Face-fix installation

#### Threaded Bracket + Top Clip Bracket

This procedure can be completed by non-professionals.


#### Step 1 - Bracket assembly

Attach the Top Clip Bracket to the Threaded Bracket and secure it in place using the supplied screw.




#### Step 2 - Position the brackets

Ensure that each supplied bracket is positioned at least 50 mm from each end of the headrail, with any remaining brackets spaced no more than 500 mm apart. Check that all brackets are aligned evenly before securing them in place.

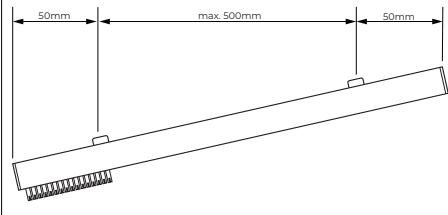


#### Step 3 - Install the track

If necessary, mark the screw positions by pencil through the bracket slots. Drill and plug the holes as required, then fix the brackets securely using appropriate fittings. (Please note that screws and fixings are not supplied).

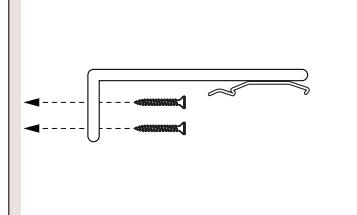

#### Step 3 - Install the track

Once the brackets are securely fixed, remove the headrail from its packaging and carefully clip it into the brackets, ensuring that it is firmly secured in place.

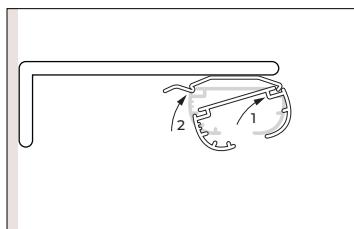


**Note:** For face-fix installation, we also offer the option of using L Brackets with stylish bracket covers, designed to provide a neat, professional finish. These brackets are capable of accommodating double systems within a single bracket set, ensuring both functionality and a clean, streamlined appearance. To find out more visit our website [www.decorquip.com](http://www.decorquip.com)

## Fitting the safety device: 'P' Clip 400990

This procedure can be completed by non-professionals.


### Step 1 - Attach the 'P' Clip to the Chain

Once the blind is securely fitted, attach the 'P' Clip to the control chain and cord.

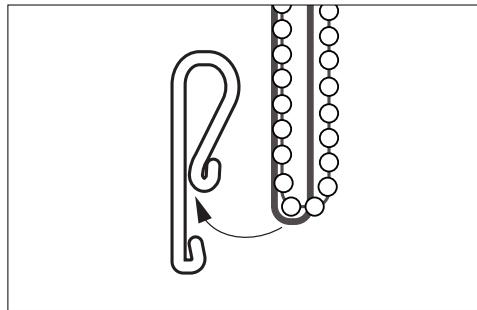


### Step 2 - Mark fixing points

Pull the chain and cord taut with the device, placing it as far from the control mechanism as possible. This keeps the controls tight, preventing slack and enhancing child safety. Once positioned, mark through the screw holes to indicate where the device will be fixed.

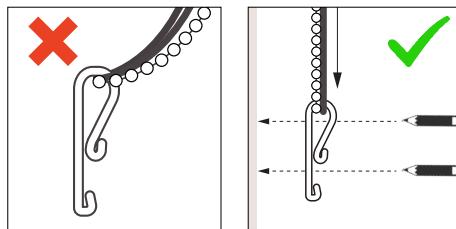


### Step 3 - Secure the Device

Move the device to one side and, using the marks made in Step 2, drill and plug the holes. Then reposition the device and fix it into place, ensuring it is securely mounted.

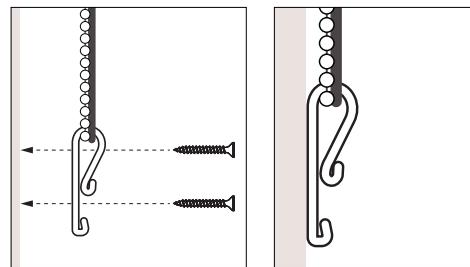

**Note:** If your blind has been supplied with a different safety device, please refer to the specific installation instructions available on our website for that device - [www.decorquip.com](http://www.decorquip.com)

### ⚠️ WARNING ⚠️



Young children can be strangled by loops in pull cords, chains, tapes and inner cords that operate the product.

To avoid strangulation and entanglement, keep cords out of the reach of young children. Cords may become wrapped around a child's neck.


Move beds, cots and furniture away from window covering cords.

Do not tie cords together. Make sure cords do not twist and create a loop.

Always fit the chain and rear cord safety devices.

## Louvre installation

**Unpack and prepare the louvres.** If the louvres are fitted with a bottom chain, ensure the chain is untangled and straight before attaching louvres to the runners. This procedure can be completed by non-professionals.



## Operation & Maintenance

**Warning!** The operating instructions must be read before operating the blind.

### Operating instructions

1. Ensure the headrail and louvres are free of obstructions and that runners move smoothly.
2. Gently pull the cord to move the louvres across the headrail
3. Gently pull the chain to rotate the louvres, adjusting them to the open or closed position.

### Maintenance Instructions

This product is designed to be maintenance-free; however, we recommend carrying out regular visual inspections to ensure that no components are damaged, as this could lead to operating difficulties or pose a safety risk. If any maintenance is required, it should be completed promptly by a reputable blind company.

For light cleaning, gently wipe or dust the fabric with a soft brush or duster.

For safety and performance, do not make alterations to the blind, chain, or safety device.