

XL Roman Blind Headrail

Fitting, operation and maintenance instructions

Warning! The operating instructions must be read before operating the blind.


Fitting Instructions for XL Roman Blind Headrail | Top-fix and face-fix installation

XL Uni Bracket

This procedure can be completed by non-professionals.


Step 1 - Position the brackets

Ensure that each supplied bracket is positioned at least 50 mm from each end of the headrail, with any remaining brackets spaced no more than 500 mm apart. Check that all brackets are aligned evenly before securing them in place.

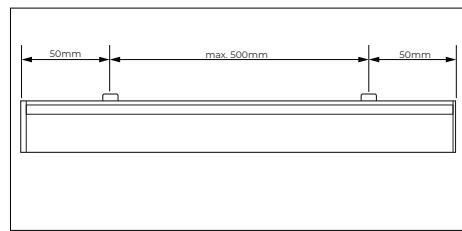


Step 2 - Mark, drill, and secure the brackets

If necessary, mark the screw positions by pencil through the bracket slots. Drill and plug the holes as required, then fix the brackets securely using appropriate fittings. (Please note that screws and fixings are not supplied).



Step 3 - Install the headrail

Once the brackets are securely fixed, remove the headrail from its packaging and carefully clip it into the brackets, ensuring that it is firmly secured in place.



Operation & Maintenance

Warning! The operating instructions must be read before operating the blind.

Operating instructions - Motorised

1. Ensure the headrail and fabric are free of obstructions.
2. Use the supplied control device to operate the blind electronically. For detailed information on operating modes, please refer to the Motorisation Instructions supplied with this blind before use.

Maintenance Instructions

This product is designed to be maintenance-free; however, we recommend carrying out regular visual inspections to ensure that no components are damaged, as this could lead to operating difficulties or pose a safety risk. If any maintenance is required, it should be completed promptly by a reputable blind company.

For light cleaning, gently wipe or dust the fabric with a soft brush or duster.

For safety and performance, do not make alterations to the blind, chain, or safety device.