

DECORQUIP


P1700 Free-Hanging Pleated Blinds

Fitting Instructions


This procedure can be completed by non-professionals. Headrails shall not be installed less than 1.5m from the floor.

1. Fitting the Brackets


- 1.1. The brackets must be fitted 50mm from each end of the headrail, with a maximum distance of 600mm between each bracket. Position the brackets and make a pencil mark where they are to be fitted.
- 1.2. If required, drill a hole to take wall plugs if required.
- 1.3. Fit the brackets using suitable screws. It is recommended that the 'flap' on front of the clips is facing into the room. Place the headrail profile in the back of the clip and push the front of the headrail upwards until it clips fully into the brackets.

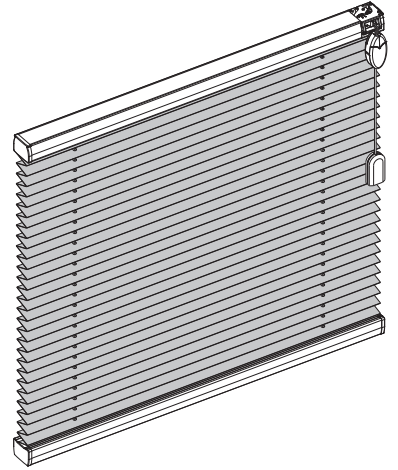

Top Fix Clip



Face Fix Bracket



2. Fitting the Safety Devices

- 2.1. Both cleat hooks supplied must be installed, one above the other, as close to the headrail as possible and not less 1.5m from the floor.
- 2.2. Mark where the cleat hooks are to be fitted and if required, drill a hole to take wall plugs.
- 2.3. Fit the cleat hooks using suitable screws.

Operating Instructions

- 1.1 Pull the cords downwards to open the blind. When the cord is released, the blind will stay in the desired position.
- 1.2. To close the blind, pull the cords to the middle of the blind and guide it into the cord lock. The blind will close. To stop the blind at any position, bring the cords back into the vertical position. The blind should lock.
- 1.3, When not in use, the operating cords must be fully wound round the cleat hooks.
- 1.4. If the white tassel on the operating cord releases, refit the tassel according to the instructions shown on the separate sheet.

Care Instructions

- 1.1 An occasional wipe with a dry cloth or duster will maintain the blind in good condition.
- 1.2 Ask your retailer for more information if you have any questions.




WARNING



Young children can be strangled by loops in pull cords, chains, tapes and inner cords that operate the product.

To avoid strangulation and entanglement, keep cords out of the reach of young children. Cords may become wrapped around a child's neck.

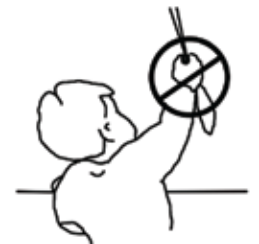

Move beds, cots and furniture away from window covering cords.

Do not tie cords together. Make sure cords do not twist and create a loop.

Always fit the child safety cleat hooks.